Fusion 24 Port 1U Cat5e Patch Panel

Each panel is supplied with 4 cage nut sets,
6 cable ties and 3 self-adhesive label strips

Part no. T70-2171

- 25 year system warranty
- Krone™ tool compatible
- Optional 1U rear cable management bar available
- Self-adhesive label strips

Optional 1U rear cable management bar
(Part no. T70-2182)

Materials	
Metal frame:	SPCC
Plastic housing:	ABS
RJ45 contact:	Phosphor Bronze with Nickel plating and Gold plating on contact area
IDC housing:	PC
IDC terminal:	Phosphor Bronze with Tin plating

Performance:	
Specification:	Category 5e
Port Density:	24 ports per 1U
Wiring Specification:	T568A & T568B
Insertion force:	900 grams for 8 contacts
Retention strength:	7.7Kgs between jack and plug
Operation Temperature:	-40° to 68°
Modular Jack:	750 mating-unmating cycles
IDC:	Up to 200 re-terminations
Compliance:	ANSI/TIA/EIA 568 B.2-1

Dimensions:

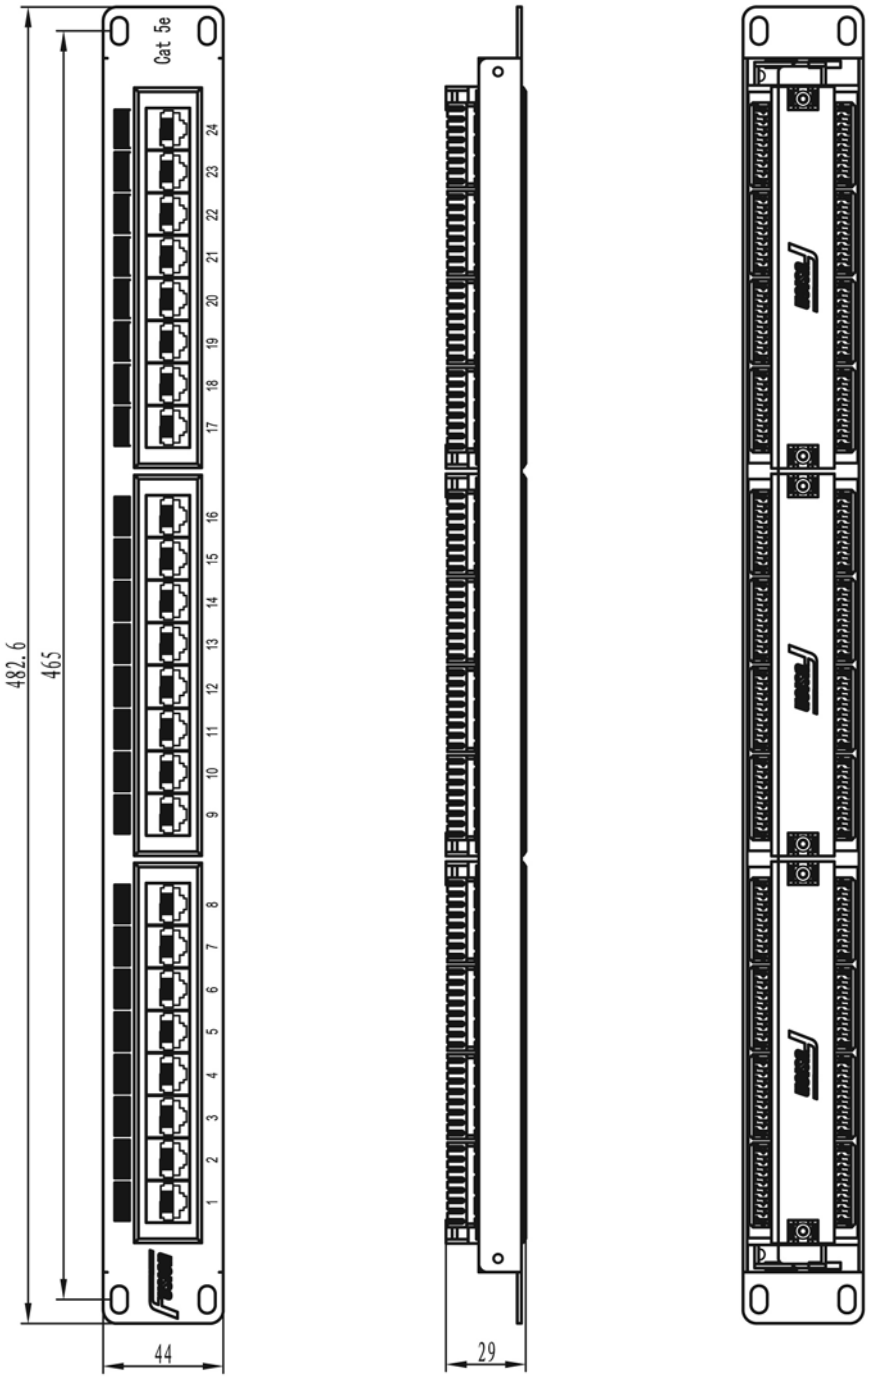

Included:

- Cable tie x 6 pcs
- ID Label x 3 pcs
- Caged nut set 4 pcs

Tel: 0845 370 4709 sales@fusiondatacom.com www.fusiondatacom.com
FUSION DATACOM, PO BOX 556, GREENFORD UB5 9JS, UNITED KINGDOM